POSTER PRESENTATION

Open Access

Modified look-locker inversion recovery T1 mapping indices: assessment of accuracy and reproducibility between MRI scanners

Fabio S Raman^{1*}, Nadine Kawel¹, Neville Gai¹, Melanie Freed², Jing Han³, Peter Kellman⁴, Chia-Ying Liu⁵, Joao A Lima⁵, David A Bluemke^{1,6}, Songtao Liu^{1,6}

From 16th Annual SCMR Scientific Sessions
San Francisco, CA, USA. 31 January - 3 February 2013

Background

Cardiac magnetic resonance (CMR) T1 mapping indices, including T1 time, partition coefficient (λ), and extracellular volume fraction (ECV) measurements, are a group of emerging noninvasive, quantitative imaging biomarkers that can be used to assess diffuse myocardial fibrosis. Similar to other quantitative MRI measurements, T1 mapping results can be influenced by multiple scanner dependent factors, such as field strength, gradient systems, coil configuration, pulse sequence design, and artifacts related to field inhomogeneity and eddy currents. The purpose of this ex-vivo phantom, multicenter study was to investigate how scanner and field strength variation affected the accuracy and precision of T1 mapping indices.

Methods

MR studies were performed on two 1.5T (1 Philips, 1 Siemens) and three 3T (2 Philips, 1 Siemens) scanners. Two sets of four phantoms were made to mimic the T1/T2 of pre- and post-contrast myocardium and blood at 1.5T and 3T. T1 mapping using modified look locker with inversion recovery (MOLLI) was performed with simulated heart rate of 40-100bpm using a standard 17 heart beat and a shorter 11 heart beat MOLLI protocol. Inversion recovery spin echo (IR-SE) sequence with TR = 10 sec was acquired during the same session to estimate the reference T1. The phantoms were taken out the magnet after IR-SE and all MOLLI protocols were re-scanned after 10 min to evaluate inter-scan reproducibility. The partition coefficient (λ) was estimated by

 $\Delta R1$ myocardium/ $\Delta R1$ blood. General linear model was used to compare the accuracy and reproducibility of T1 and λ across field strength, scanners and protocols.

Results

The IR-SE T1 values were significantly different across scanners within the same field strength. The average partition coefficient estimated from IR-SE was 43.7% (1.5T) and 46.0% (3T), similar to normal in-vivo values. Accuracy was defined as the percent error between MOLLI and IR-SE, and scan/re-scan reproducibility was reported as the relative percent mean difference between the two back to back MOLLI scans. T1 and λ accuracy both varied significantly between different scanners (p<0.0001 for both T1 and λ) and across heart rates (p<0.0001 for T1 and p=0.001 for λ). However, neither varied across the standard 17HB and 11HB protocols (p=0.177 for T1 and p=0.574 for lamda). Additionally, field strength significantly affected T1 accuracy but not λ accuracy (p<0.0001 for T1 vs. p=0.109 for λ). In addition to less variability in accuracy, λ also had lower percent error overall between scan repetitions, or higher scan/re-scan reproducibility, than T1 measurements (4.59% vs. 5.54%).

Conclusions

MOLLI T1 mapping indices, including both native T1 and λ , exhibited significant accuracy and precision variation across scanners. Compared with absolute native T1, relative T1 mapping indices, such as λ , has less variability in accuracy across platforms and field strength as well as higher scan/re-scan reproducibility, which is ideal for multicenter studies.

Full list of author information is available at the end of the article



¹Radiology and Imaging Sciences, National Institutes of Health Clinical Center, Bethesda, MD, USA

Table 1 T1 partition coefficient accuracy and reproducibility

a)	T1			Partition coefficient		
1.5T scanners	Accuracy	Reproducibility		Accuracy	Reproducibility	
1	6.70 ± 0.46	5.17 ± 0.44		7.93 ± 0.96	2.09 ± 0.92	
2	5.97 ± 0.41	5.45 ± 0.33		9.71 ± 0.85	10.67 ± 0.70	
3T scanners						
3	8.01 ± 0.41	4.71 ± 0.33		8.85 ± 0.85	6.36 ± 0.70	
4	13.91 ± 0.41	3.80 ± 0.33		8.60 ± 0.85	5.55 ± 0.70	
5	10.58 ± 0.41	3.07 ± 0.33		6.66 ± 0.85	2.21 ± 0.70	
b)	Field strength			Protocol		
	1.5T	3T	p-value	17 HB	11 HB	p-value
T1 accuracy	6.33 ± 0.31	10.83 ± 0.23	< 0.0001	8.34 ± 0.27	8.83 ± 0.27	0.177
T1 reproducibility	5.31 ± 0.27	3.86 ± 0.19	< 0.0001	4.46 ± 0.23	4.71 ± 0.23	0.432
λ accuracy	8.82 ± 0.64	8.04 ± 0.49	0.109	8.32 ± 0.57	8.53 ± 0.57	0.574
λ reproducibility	6.38 ± 0.58	4.71 ± 0.40	0.021	4.50 ± 0.46	6.58 ± 0.46	0.003

Table 1a shows the accuracy and reproducibility results for the 5 scanners used in the multicenter study while b shows the dependence of field strength and protocol on accuracy and reproducibility. Data is presented as least square means ± standard error. Accuracy is reported as the percentage difference between MOLLI and IR-SE. Scan/rescan reproducibility is reported as the relative percent mean difference between two MOLLI scans. Scanners:1- Avanto, Siemens, 1.5T; 2- Achieva, Philips, 1.5T; 3- Verio, Siemens, 3T; 4- Achieva, Philips, 3T.

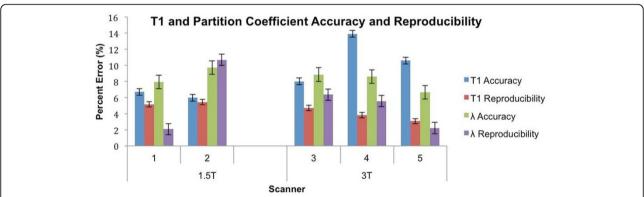


Figure 1 shows the accuracy and reproducibility measurements for both T1 and partition coefficient for each of the 5 scanners. Data is presented as least square means ± standard error. Accuracy is reported as the percentage difference between MOLLI and IR-SE. Scan/rescan reproducibility is reported as the relative percent mean difference between two MOLLI scans. Scanners:1- Avanto, Siemens, 1.5T; 2- Achieva, Philips, 1.5T; 3- Verio, Siemens, 3T; 4- Achieva, Philips, 3T; 5- Achieva, Philips, 3T.

Funding

Funded by the National Institutes of Health (NIH) Intramural program.

Author details

¹Radiology and Imaging Sciences, National Institutes of Health Clinical Center, Bethesda, MD, USA. ²Facultad de Física - Pontificia Universidad Católica de Chile, Macul, Santiago, Chile. ³U.S. Food and Drug Administration, Rockville, MD, USA. ⁴Laboratory of Cardiac Energetics, National Heart, Lung and Blood Institute, Bethesda, MD, USA. ⁵School of Medicine, Johns Hopkins University, Baltimore, MD, USA. ⁶Molecular Biomedical Imaging Laboratory, National Institute of Biomedical Imaging and Bioengineering, Bethesda, MD, USA.

Published: 30 January 2013

doi:10.1186/1532-429X-15-S1-P134

Cite this article as: Raman et al.: Modified look-locker inversion recovery T1 mapping indices: assessment of accuracy and reproducibility between MRI scanners. Journal of Cardiovascular Magnetic Resonance 2013 15(Suppl 1):P134.